

Long Life recirculation kit DWZ1IT1D1



External recirculation kit with regenerative Long Life filter: Removes odors reliably over a period of up to 10 years.

- For recirculation operation
- Can be combined with slimline hoods and selected canopy hoods.
- Can be used multiple times, the regenerative active carbon filter is regenerated in the oven with a recommendation of every 4 months. Simply place in the oven for 2 hours at 200°C.
- For assembly in the upper cabinet

Technical Data

Dimensions of the packed product (HxWxD): 365 x 300 x 690 mm

Pallet dimensions: 200.0 x 80.0 x 120.0

Standard number of units per pallet: 20

Net weight: 7.2 kg

Gross weight: 8.7 kg

EAN code: 4242005223695



Long Life recirculation kit DWZ1IT1D1

**External recirculation kit with
regenerative Long Life filter: Removes
odors reliably over a period of up to 10
years.**


Optional accessories

- For recirculation operation
- Can be combined with slimline hoods and selected canopy hoods.
- Can be used multiple times, the regenerative active carbon filter is regenerated in the oven with a recommendation of every 4 months. Simply place in the oven for 2 hours at 200°C.
- For assembly in the upper cabinet

Long Life recirculation kit DWZ1IT1D1

Measurements in mm


Installation of canopy hood with circulated air kit

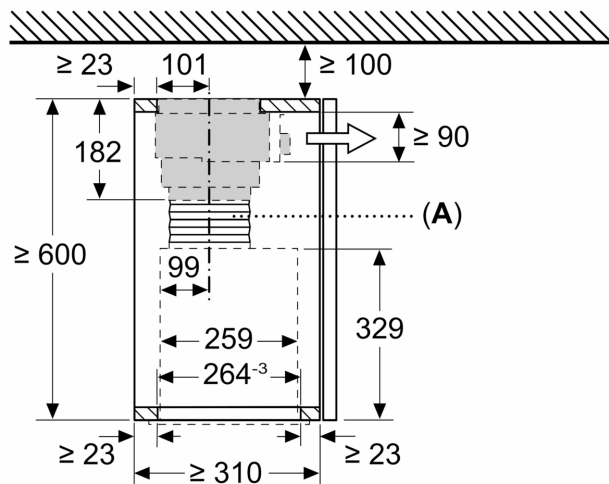

A: Flexible hose


Measurements in mm

Installation of canopy hood with circulated air kit

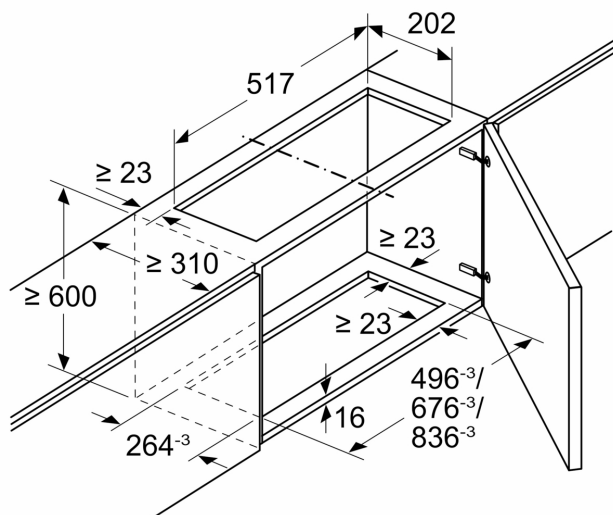

Measurements in mm


Installation of telescopic hood with circulated air kit and lowering frame

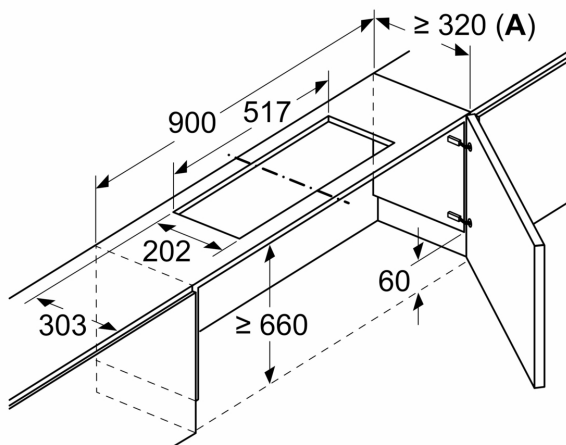



A: See combination table

Measurements in mm


Installation of telescopic hood with circulated air kit and lowering frame

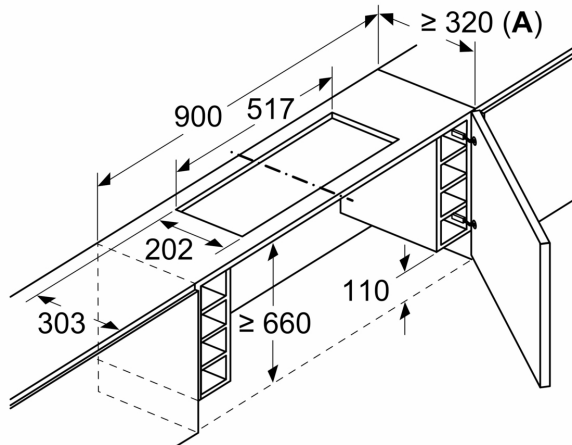

A: See combination table

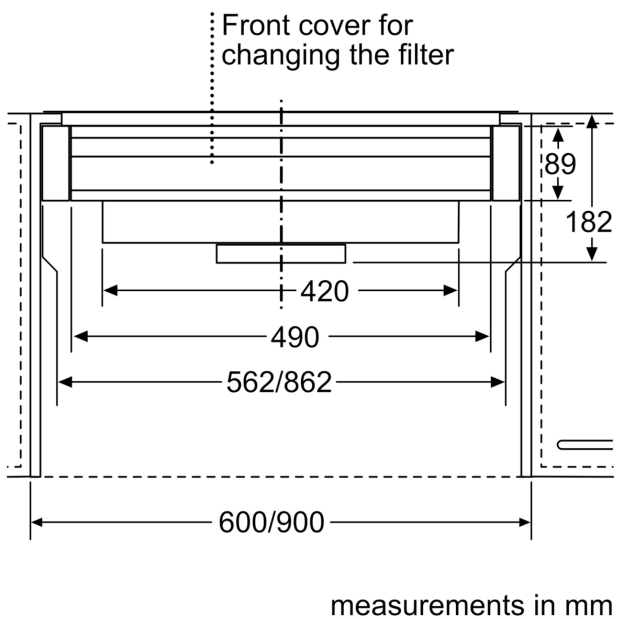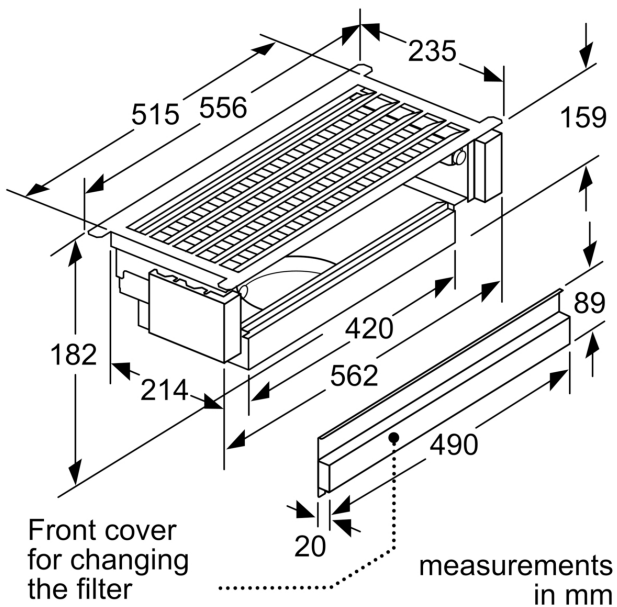


Measurements in mm
Installation of telescopic hood with circulated air kit

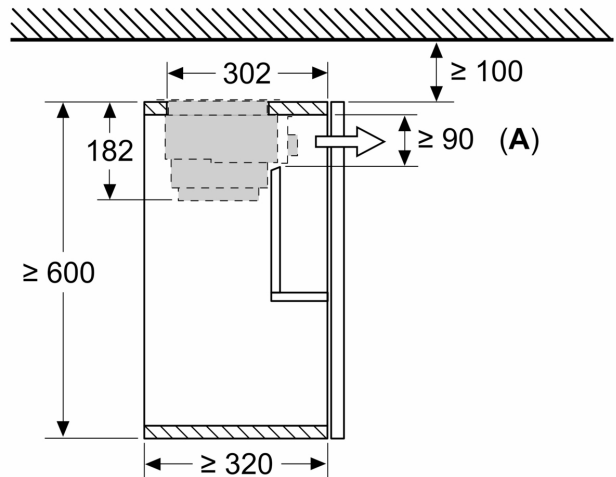


A: Filter change

Measurements in mm
Installation of telescopic hood with circulated air kit

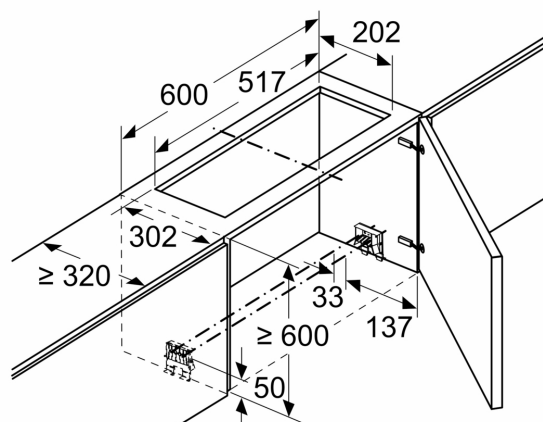


Not possible to use a circulated air kit for cupboards with transverse cross-members (lifting doors)

Measurements in mm
Installation of telescopic hood with circulated air kit

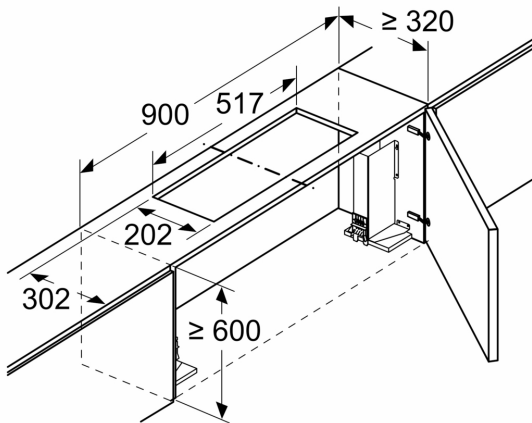


Not possible to use a circulated air kit for cupboards with transverse cross-members (lifting doors)

Measurements in mm
Installation of integrated design hood with circulated air kit

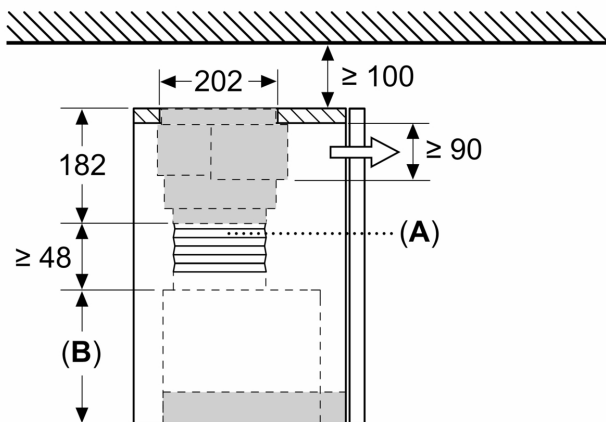


A: Flexible hose
B: Appliance height

Measurements in mm
Installation of telescopic hood with circulated air kit and lowering frame

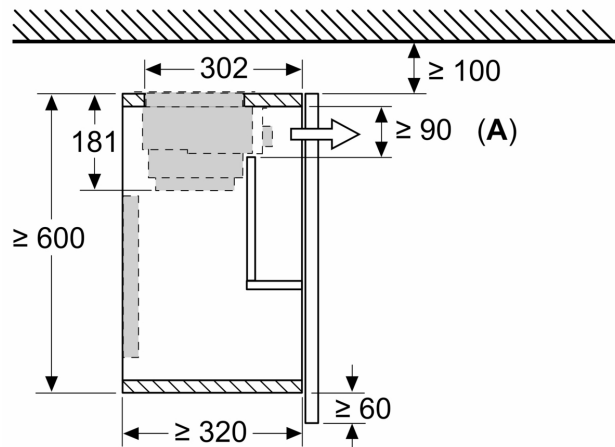

A: Filter change

Measurements in mm
Installation of integrated design hood with circulated air kit

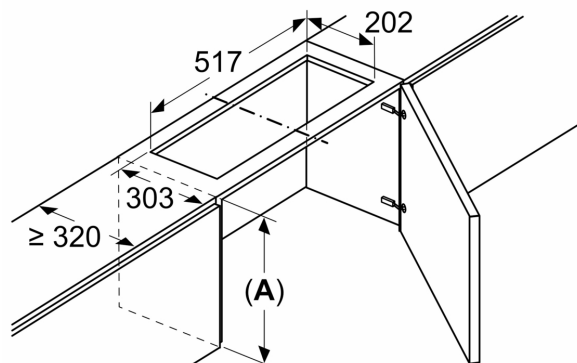

Not possible to use a circulated air kit for cupboards with transverse cross-members (lifting doors)
A: ≥ appliance height + 230 mm